



LED RGBW Mini Par

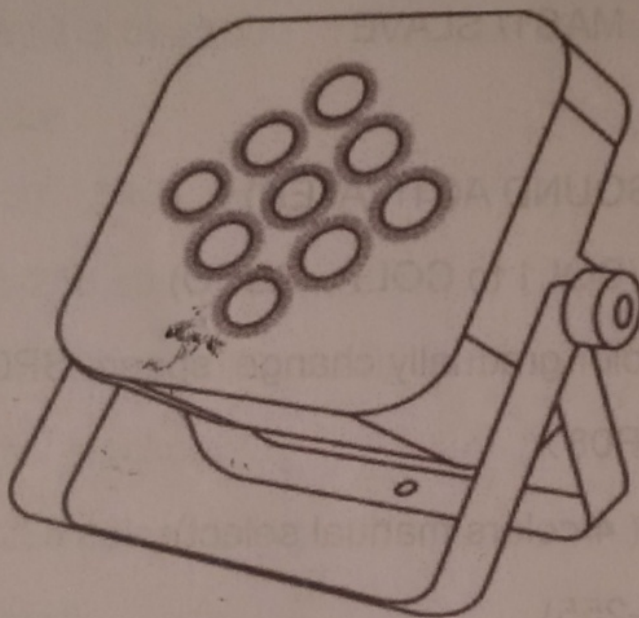


User Manual

Please read over this manual before operation


一、 Display Function:




Menu



down



up



Enter

1、 ADDR : 1-512

2、 SLND : MAST/ SLAVE

3、 SHND:

SOUN (SOUND ACTIVATED)

COLOR (COL1 to COL7、 AUTO)

FADE (color gradually change, speed: SP01
to SP08)

4、 MANU (4 colors manual select):

RED (0-255)

GREE (0-255)

BLUE (0-255)

WHITE(0-255)

5: FHRS(Time of the device with power on, sum up in
HOURS)

二、 DMX Function:

CH1: 0 is blackout; 1-255 RGBW dimmer

CH2: Red (0 is blackout; 1-255 red dimmer);

CH3: Green (0 is blackout; 1-255 green dimmer);

CH4: Blue (0 is blackout; 1-255 blue dimmer);

CH5: White (0 is blackout; 1-255 blue dimmer);

CH6: Strobe

0-127 blackout。

128-255 strobe slow to fast;

CH7: Color mixing and auto-run

0-15 blackout;

16-255 color mixing and run automatically (from slow to fast);

Features:

Voltage: AC110/120V-220V/240V, 50/60Hz

Power Consumption: 45W

Lamp: 9*4W high brightness 4in1 LED

LED life: 6-10 ten thousand hours

LED angle: 25 degree

Color: 16.7 million kinds of color change

Control channels:4/7CHs

Control mode: DMX512, master/slave, auto, sound active

Automatic model (by function button):

Color change, color strobe, color dimmer, color gradual change/color jump change

Operation menu: 4 digit digital LED display

Packing size: 240*130*250mm

N.W: 2kg

G.W: 2.3kg